

OV300E ELECTRIC MINI ROTATING RACK CONVECTION OVEN

FEATURES

ROTATING RACK

Not widely offered on ovens of this type, the rotating rack, in combination with the low velocity/high volume air flow, promotes an even bake--from cakes to Artisan breads.

EASY-TO-USE CONTROL PANEL

- 84-recipe setting storage
- Pulse airflow
- Fan delay feature
- Automatic damper

EXCELLENT PRODUCT VISIBILITY

The over-sized viewing windows, rotating rack and interior lighting promote the sale of your product by increasing its visibility to the customer.

SELF-CONTAINED STEAM SYSTEM

The steam system has quick recovery and high volume production from independent aluminum finned heat sinks, each with two wide angle nozzles.

EASY TO OPEN INDEPENDENT DOORS

Magnetic catches help form a tight seal, yet make doors easy to open and shut. The durable doors have no breakable chains or pulleys.

STAINLESS STEEL INTERIOR AND EXTERIOR

Durable stainless steel construction lasts for years.





OV300 shown with optional trim and proofing cabinet

The Mini-Rack Oven offers all the baking and roasting quality of a full size rack oven on a smaller scale. Available bases--proofer or stand with shelves--save space while increasing storage and versatility.



BAXTER

OV300E ELECTRIC SPECIFICATIONS

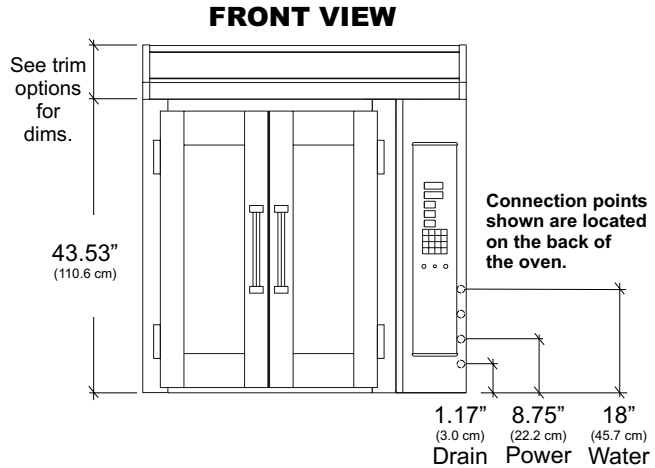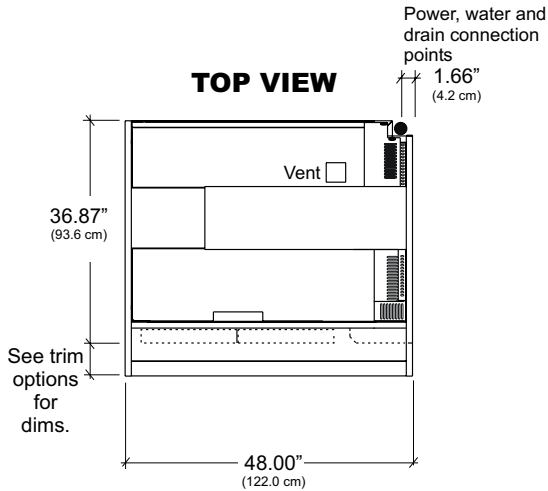

ORDERING INFORMATION

Capacity Choices

8-pan capacity (18"x 26") with 4" slide spacing (std)

6-pan capacity (18"x 26") with 5.31" slide spacing

Rack Loading Choices:

End Load (std) or Side Load

Trim Piece Options:

Standard Trim Package
Depth from front of door=.62"
Height=4.38"

Optional Trim Package
Depth from front of door=5.75"
Height=8.06"

Optional proofer and stand available. Slides, screen surface or hearthstone trays available for half-size pans, pizza or Artisan breads.

Freight Class: 85

Shipping Weight: 700 lbs (318 kg)

UTILITIES

Water Connect Point: 1/2" pipe size. Cold water @30-75 psi. (21 kPa-52kPa) minimum @ 1.2 G.P.M. (4.5 liters/min.) flow rate.

Drain Fitting: Route 1/2" rear drain to air-gap drain.

Vent: Type 1 hood may be required, consult local code.

Power Input Choices:

Heating Circuit	Control Circuit	} 15 amp max. dedicated circuit
208V/3/50A	120V/1PH/	
220-240V/3/40-43A	120/1 PH/	
208V/1/86A	120/1 PH/	
220-240V/1/69-75A	120/1 PH/	
440-480V/3/20-22A	120/1 PH/	

Oven Control: 4.4 amps

Ventilator Connect Point: 5.0 amps max.

Contact factory for 50Hz.

INSTALLATION

Level floor required. The mini-rack oven is shipped assembled for easy installation. All components are factory tested before shipment.

The purchaser is responsible for proper installation. In order to validate the warranty, the start-up must be performed by an Authorized Baxter Servicer. This start-up will be done at no additional charge.

OV300 unit will fit through a standard 36" doorway with doors, control panel and trim package removed. (Cosmetic canopy option is shipped unattached.)

Certified for zero clearance to combustible surfaces, sides and back. 24"-36" access to right side needed for service access.

Specifications subject to change, consult factory for information.



BAXTER

OV300E

PRINTED IN U.S.A. 5/02

BAXTER • 19220 STATE ROUTE 162 EAST • ORTING, WA 98360
(360) 893-5554 • CUST SVC: (800) 777-2828 • FAX: (360) 893-6836 • www.baxtermfg.com