


Model 90AL

Safety signs not shown for photo purposes.

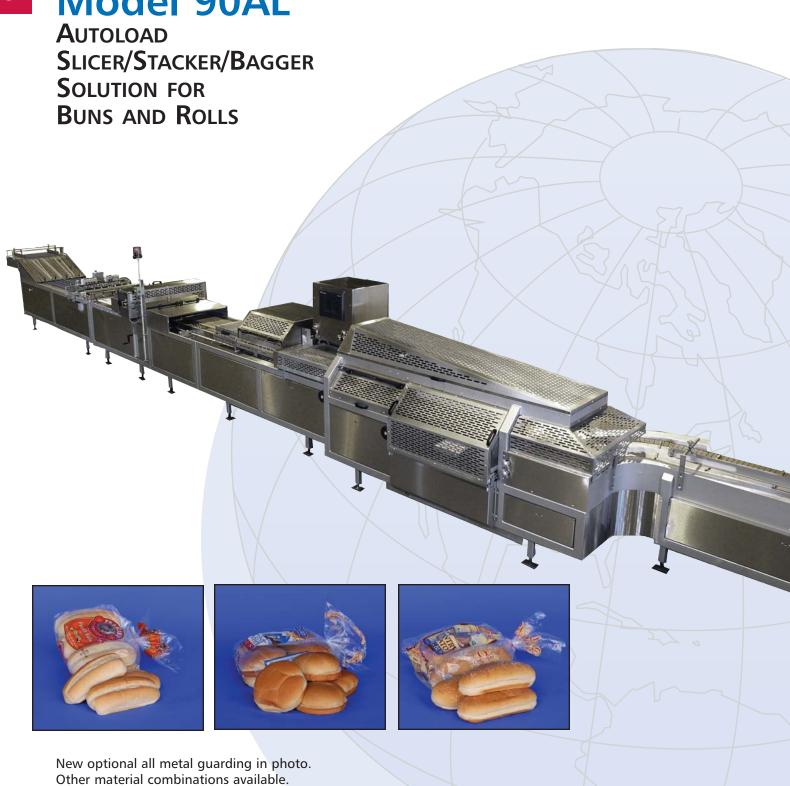

Mid-West Sales & Manufacturing

15815 W. 110th Street Lenexa, KS 66219 Tel: (913)541-8700 • Fax: (913) 541-078 officeks@ubeusa.com

West Coast Sales & Manufacturing

T9216 S. Laurel Park Road Rancho Dominguez, CA 90220 Tel: (310) 635-8121 • Fax: (310) 635-8171 sales@ubeusa.com

www.ubeusa.com



Specifications vary by product and application. Please contact our sales office about product varieties and speeds.

Electrical 208/230/380/460 V - 3 Phase, 50/60 Hz

Air Requirements 8 CFM, 90 PSI - Dry filtered



UBE builds the AUTOLOAD for each customer's particular needs. Over 1000 installations required numerous customer driven innovations. Your machine may vary from this typical unit illustrated. UBE wants to meet with you and design your new line.

Features:

- · Straight through packaging
- High speed capacity
- · Unmatched versatility
- Simplicity of design
- State of the art controls
- GuardLogix® controller a full-function Logix processor that also provides safety control. The GuardLogix system is a dual processor solution that uses a primary controller and a safety partner to achieve SIL 3, PLe/Cat.4.

Options:

- Bag closing may be done by standard closing machines.
- · Metal guards
- Stainless steel frame construction

Auxiliary Equipment may change specifications consult UBE and your bag supplier on bag specifications

Technical Layout:

