


Cutler Industries Modular Style Gas Direct Fired Revolving Tray Oven — Model PNL

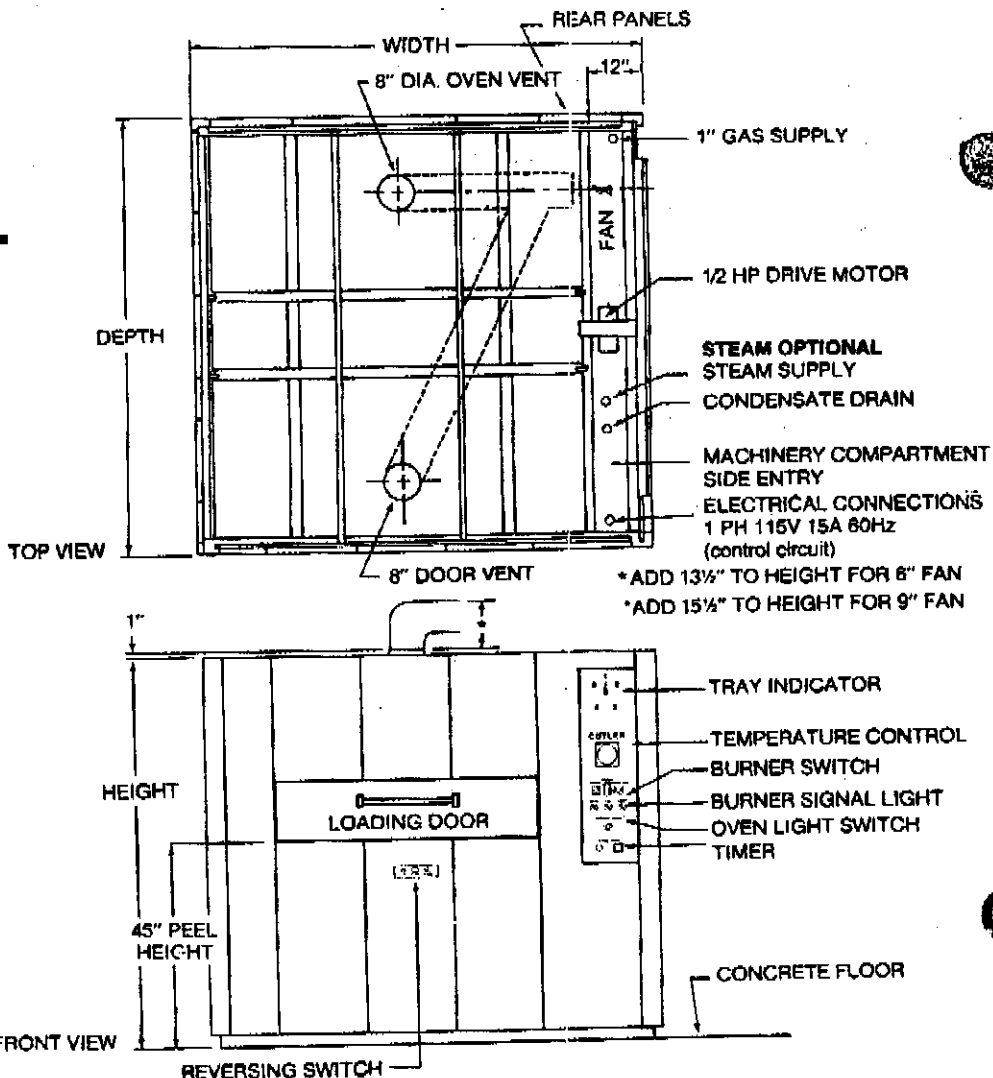

NOTE: Right hand unit shown.

Engineering Data

SIZE PNL-10

5 trays, 26" x 38"
Capacity 10 pans
79" wide x 93 1/4" deep x 85" high
Required gas pressure — 6" to 8"
BTU per-hour max* — 95,000
Combustion outlet CFM — 60
Door vent CFM — 150
Recommended draft —
.02 to .04 W C at stack outlet.

SIZE PNL-15

5 trays, 26" x 56"
Capacity 15 pans
97" wide x 93 1/4" deep x 85" high
Required gas pressure — 6" to 8"
BTU per hour max* — 138,000
Combustion outlet CFM — 75
Door vent CFM — 250
Recommended draft —
.02 to .04 W C at stack outlet.

SIZE PNL-20

5 trays, 26" x 78"
Capacity 20 pans
118" wide x 93 1/4" deep x 85" high
Required gas pressure — 6" to 8"
BTU per hour max* — 184,000
Combustion outlet CFM — 100
Door vent CFM — 350
Recommended draft —
.02 to .04 W C at stack outlet.

SIZE PNL-25

5 trays, 26" x 95"
Capacity 25 pans
137" wide x 93 1/4" deep x 85" high
Required gas pressure — 6" to 8"
BTU per hour max* — 230,000
Combustion outlet CFM — 130
Door vent CFM — 750
Recommended draft —
.02 to .04 W C at stack outlet.

*Average consumption approximately 50% max, on most products. B units - An additional burner increases BTU by 50%.

Main shaft bearings outside oven, away from heat zone.

Electrical rating: 115V, 1PH 60HZ 15 amps. Max

NOTE: Right hand unit show.

Planning purposes only. Consult factory for specifics.



Cutler Industries, Inc.
8300 Austin Ave.
Morton Grove, IL 60053
(847) 965-3700
FAX: (847) 965-8585

Cat. PNL-DG
5/96