


Rack configurator

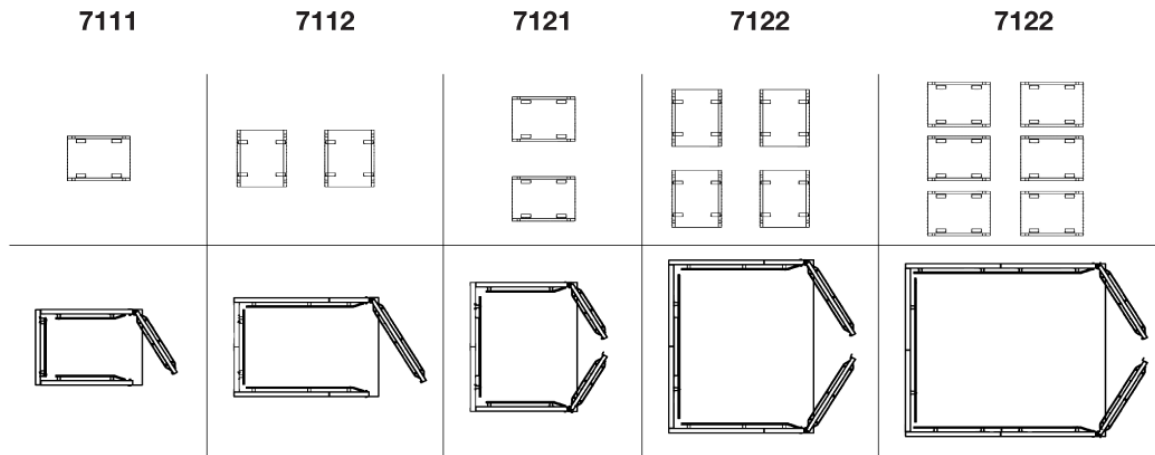

Utility Requirements

- > Water Supply
G ½" 28PSI
- > Drain
¾" connection back
- > Electrical
3 phase

NOTE: All voltages available, check with factory



| Model | No. of racks single double | No. of doors | Door opening size (w x h) | Heating capacity | Inside dimensions (w x d x h) | Outside dimensions (w x d x h) |
|-------|-------------------------------|--------------|---------------------------|------------------|-------------------------------|--------------------------------|
| 7111 | 1 single | 1 | 28" x 77.5" | 3.3 kw | 28" x 36" x 74" | 36.5" x 45.5" x 95.5" |
| 7112 | 2 singles or 1 double | 1 | 32.5" x 77.5" | 3.3 kw | 32.5" x 42" x 74" | 41" x 52" x 95.5" |
| 7121 | 2 singles or 1 double | 2 | 46" x 77.5" | 3.3 kw | 46" x 36" x 74" | 54.5" x 45.5" x 95.5" |
| 7122 | 4 singles or 2 doubles | 2 | 59" x 77.5" | 5 kw | 59" x 42" x 74" | 67.5" x 52" x 95.5" |
| 7123 | 6 singles or 3 doubles | 2 | 59" x 77.5" | 5 kw | 59" x 66" x 74" | 67.5" x 76" x 95.5" |

Continuous product development is a Revent policy. Therefore, we reserve the right to change specifications and/or design without prior notice. Pictures or drawings may include product options.

Revent sales representative: