Arctica Signature Series

Presentation is Everything ™


49" Standard

7 DCT 20 40	20.05#12	A 40"D 40 20"LL
¤ RST-38-49	38.25″L x 3	34.19"D x 49.38"H
X RST-48-49	47.81"L x 3	34.19"D x 49.38"H
¤ RST-57-49	57.38"L x 3	34.19"D x 49.38"H
¤ RST-76-49	76.50"L x 3	34.19"D x 49.38"H
X RST-96-49	95.63"L x 3	34.19"D x 49.38"H
¤ RST-115-49	114.75"L x	34.19"D x 49.38"H
7 - 16 - 1	~ -	~ -

Self-Contained Remote Dry

Arctica recommended for: Bakery and Deli.

Item #: .	
Project:	
Date:	



49" Standard	Standard Specifications:	Options:	
Construction	 \Pi Welded aluminum frame construction \Pi Levelers \Pi Brushed steel interior \Pi Tilt-out front glass \Pi \Pi		
Glass	🛛 Low profile glass (DL)	🌣 Flat glass (FG)	
Shelf Supports	Epoxy powder painted (black)	© Epoxy powder painted (white) © Epoxy powder painted (colour):	
Shelves	🌣 Glass shelves		
Aluminum Trim	🌣 Satin finish	© Chrome anodized © Brass anodized © Epoxy powder painted (colour):	
End/Divider Glass	¤ 1/4" tempered glass	🛚 1/4" tempered glass mirrored	
Sliding Doors	🌣 Pike glass	Pike glass mirrored	
End Panels/Decorboard/ Kickboard	Choice of 8 standard colours:		
Fold-Down Work Shelf	Wilsonart frosty white	SaniboardSurell (similar to Corian)Stainless steel	
Equipment	Defogging systemAdjustable shelvesRemovable end panels		


1.800.839.5536

www.arctica.ca



Presentation is Everything ™

49" Standard

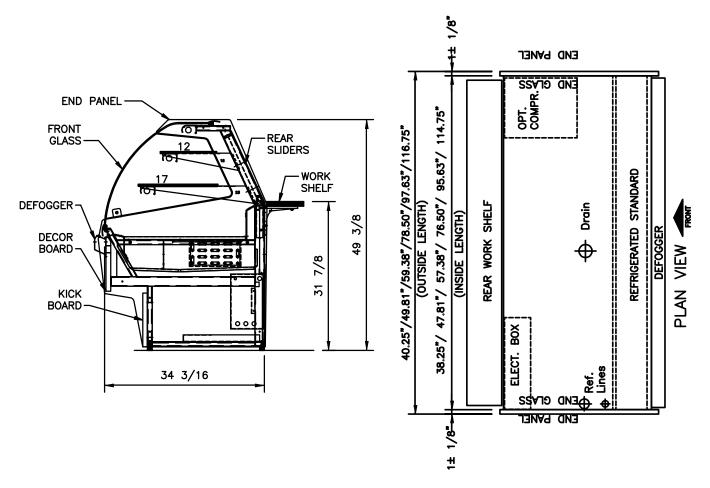

Model	Length (inches)	Length (millimeters)	Voltage	Amps (Remote)	Amps (Self-Contained)	Amps (Dry)
RST-38-49	38.25"	972mm	115V / 1 / 60	2.1	11.5	
RST-48-49	47.81"	1,214mm	115V / 1 / 60	2.3	13.0	
RST-57-49	57.38"	1,457mm	115V / 1 / 60	2.7	13.4	1.0 for all
RST-76-49	76.50"	1,943mm	115V / 1 / 60 230V / 1 / 60	3.6	3.6 8.7	models; a single 115V hook-
RST-96-49	95.63"	2,429mm	115V / 1 / 60 230V / 1 / 60	4.3	11.8* 8.7	up required for all dry models.
RST-115-49	114.75"	2,915mm	115V / 1 / 60 230V / 1 / 60	4.7	12.2* 8.7	

*Call factory: (1) if you have drain accessibility, and/or (2) if you're looking for savings; depending on your geographic location, you could save 900 to 1500 Watts of electrical energy.

SPECS: aluminum support frame; leveling legs; brushed stainless steel interior; epoxy painted upper structure; anodized aluminum trim; .25 tempered shelf; end and front curved glass; tilt-out front glass standard.; lights with spectrum sleeves all shelves; laminated plywood finish; self-contained (R134a) with hot gas evaporator or remote; refrigerated cases are fitted with a defogging system that will keep the front glass clear of moisture in a controlled environment not exceeding 75°F and 55% relative humidity. ETL sanitation listed to NSF Standard 2, 4 and 7.

