


# Belshaw™

A **WELBILT** Company

Worldwide leader in the design, manufacture, installation, training and service of donut production equipment.

## SpaceSaver Shortening Filter

**SF100, SF175, SF200, and SF225**

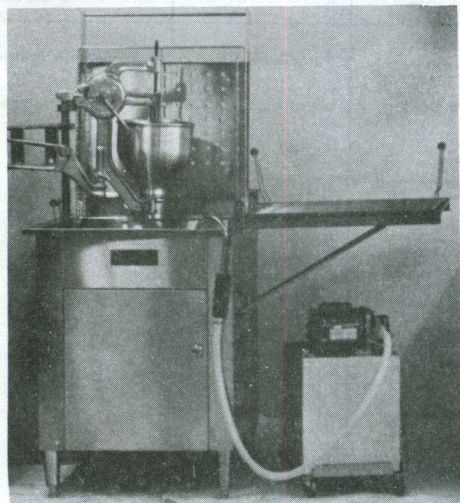

SpaceSaver Model SF-100

- \* HEAVY DUTY CONSTRUCTION
- \* QUICK SET UP
- \* 1/3 HP. MOTOR
- \* SAFETY GRIP HOSE
- \* ROLLS INTO PLACE ON CASTERS
- \* EASY TO CLEAN AND STORE


The SpaceSaver Filter reduces costs, prolongs the useful life of frying shortenings and assures a fresh, wholesome taste and smell of cooked food.

The SpaceSaver Filter is easy to use. It rolls into position on casters and less than 10 minutes are required to drain the shortening from the kettle and return by pump filter action, sediment free and ready to re-use. Burnt food particles and unwanted solids are removed. Moisture and free fatty acids are reduced.

The SpaceSaver Filter is easy to clean. Disposable paper filter pads are used. The SpaceSaver Filter can be stored under Belshaw Floor Model Fryers when not in use. All models can be used with gas or electric fryers and are portable. Thus a single SpaceSaver Filter can serve a bank of fryers.

Four SpaceSaver Filter Models are available:

- Model SF-100, capacity 96 lbs. (44 kg)
- Model SF-175, capacity 162 lbs. (73 kg)
- Model SF-200, capacity 194 lbs. (88 kg)
- Model SF-225, capacity 211 lbs. (96 kg)

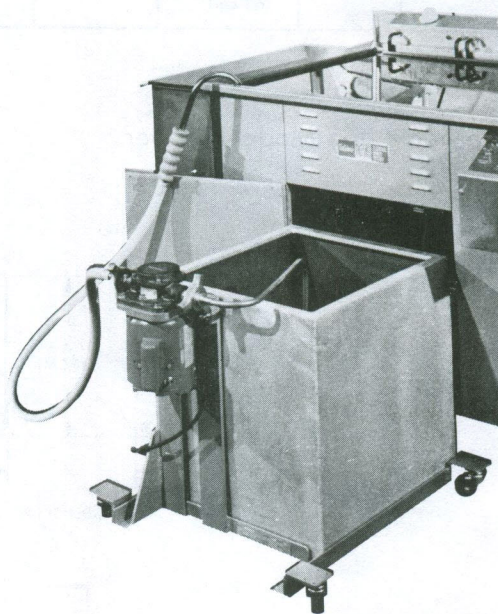

SpaceSaver Model SF-200  
Shown with Belshaw 634 Fryer

CE

**Belshaw Bros., Inc.**

1750 22nd Avenue South, Seattle, WA 98144-4590, U.S.A.

Phone: +1 (206) 322-5474 • Fax: +1 (206) 322-5425

Email: [sales@belshaw.com](mailto:sales@belshaw.com) • Web Site: <http://belshaw.com>

MEMBER  
**BEMA**

**NAFEM**

# MODELS SF100, SF175, SF200, SF225


## SPECIFICATIONS & DRAWINGS

Manufactured by  
**BELSHAW BROS., INC.**  
 1750 22nd Avenue South  
 Seattle, Washington 98144  
 Largest manufacturers of  
 donut cutting equipment in the world


MODEL	USE WITH	OVER ALL DIMENSIONS	APPROX. SHIP. WGT.	ELECTRICAL		CAPACITY	CONSTRUCTION	STANDARD EQUIPMENT
				Volts, Hertz, Phase	Nom. Amp.			
SF-100	618 618L 624 718LG	H-24-3/8" (62 cm) W-13-7/8" (35 cm) L-18-5/8" (47 cm)	70 lbs. (32 kg)	115 V. 60 Hz. 1 Ph.	6.5	96 lbs. (44 kg) Shortening	Aluminum alloys, electroless nickel plated steel, bronwite bronze, FDA approved hose, wood handle.	Frame with casters, tank, pump, motor, filter assembly and 6 filter pads, hose with safety grip.
				115 V. 50 Hz. 1 Ph.	6.4			
				230 V. 60 Hz. 1 Ph.	3.25	162 lbs. (73 kg) Shortening		
				230 V. 50 Hz. 1 Ph.	3.2			
SF-175	724	H-22-1/2" (57 cm) W-23-1/8" (59 cm) L-25-1/4" (64 cm)	129 lbs. (59 kg)					
SF-200	634	H-22-3/8" (59 cm) W-26-5/8" (68 cm) L-25-1/4" (64 cm)	129 lbs. (59 kg)			194 lbs. (88 kg) Shortening		
SF-225	734G C100 C200	H-21 (53 cm) W-30-3/4" (78 cm) L-24-3/4" (63 cm)	133 lbs. (60 kg)			211 lbs. (96 kg) Shortening		

### HOW TO ORDER:


Give name and Model number.

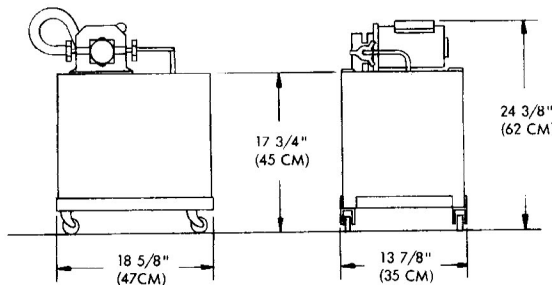


MODEL SF100

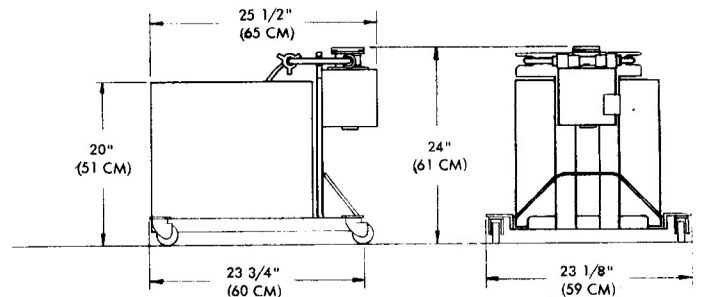

MODEL SF175

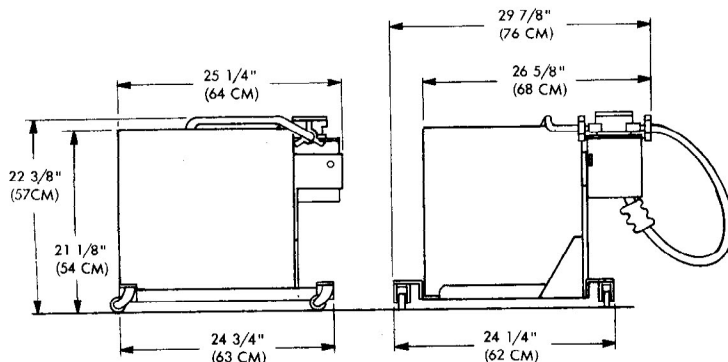

MODEL SF200

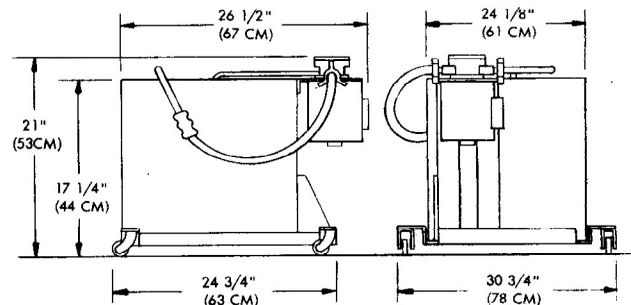

MODEL SF225