


# BURFORD® TWIST TYERS

Automatic twist tie machines designed for use with automatic baggers and manual bag load applications.



RIGHT HAND TYER SHOWN

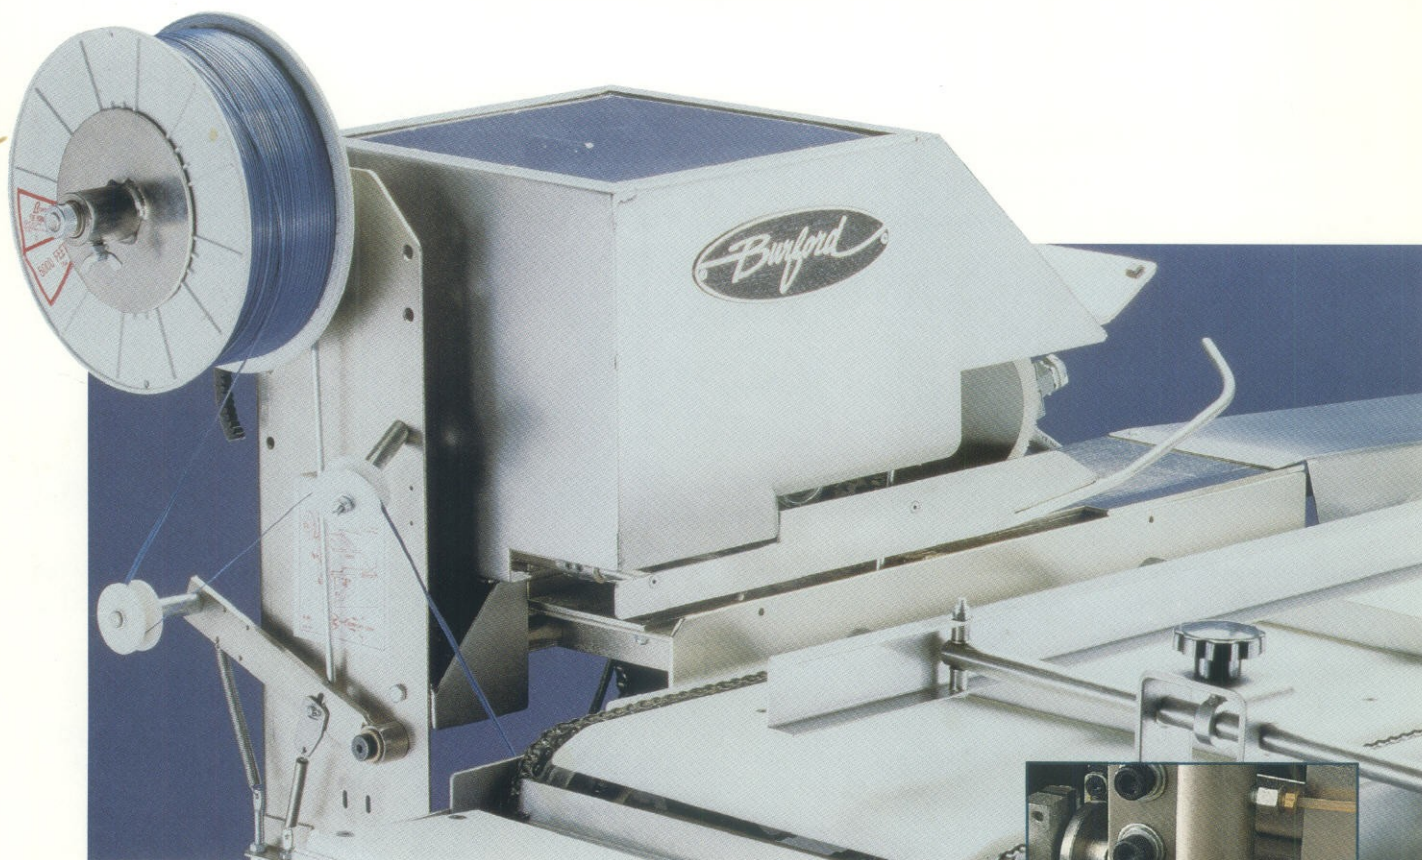

Burford® Twist Tyers close and twist the poly bags with the customer preferred easy open - easy close Burford® Twist Tie Closures.

Several models are available for a wide variety of applications.



**Burford®**  
(bc)

CALL YOUR AUTHORIZED REPRESENTATIVE OR  
CALL US TODAY. 1-800-654-4530

PRACTICAL SOLUTIONS THROUGH INNOVATIVE TECHNOLOGIES

P.O. Box 748 • Maysville, OK 73057 • Telephone (405) 867-4467 • Fax (405) 867-4219 • e-mail: [sales@burford.com](mailto:sales@burford.com) • web site: [www.burford.com](http://www.burford.com)



## TWIST TYERS



### Features:

- Nickel-Plated...No Painted Surfaces
- Manifold Central Lubrication
- Guarding to Meet Safety Standards
- Nema 12 Electrics
- Heavy-Duty Construction
- Automatic Safety Shut-Off

### Parts and Service:

- Burford Maintains a Fully Stocked Spare Parts Inventory Ready for Immediate Shipment.
- A Factory-Trained Staff of Service Technicians is Available for Service and Installation.

#### DEMAND-TYPE BURFORD TWIST TYERS

Demand-Type Burford Twist Tyers cycle upon the presence of a package. No timing is required between the conveyor and tyer. Some models (\*) incorporate a self-contained drive motor, others are chain driven from the conveyor or bagger. Demand Models:

##### RIGHT HAND

\* 50 - 7  
\* 60 - 7  
\* 76 - 6  
76

##### LEFT HAND

\* 51 - 7  
\* 61 - 7  
\* 77 - 6  
77

#### NON-DEMAND-TYPE BURFORD TWIST TYERS

Non-Demand-Type Burford Twist Tyers are driven by the bagger's conveyor output drive shaft. the tyer is timed to the bagger's discharge flights. Models:

##### RIGHT HAND


\* 50 - 7  
\* 60 - 7  
\* 76 - 6  
76  
84  
86  
\* 48  
55 - 8  
66

##### LEFT HAND

\* 51 - 7  
\* 61 - 7  
\* 77 - 6  
77  
85  
87  
\* 49  
55 - 9  
67

##### REQUIRED CONVEYOR FLIGHT SPACING

9"  
12"  
16"  
12"  
16"  
18"  
12"  
12"  
9"

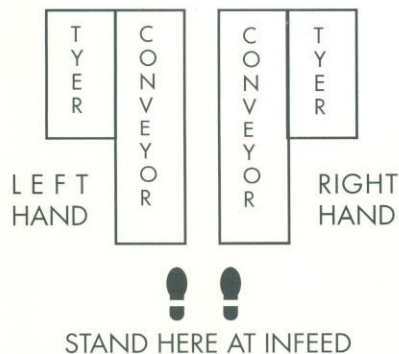

#### SPECIFICATIONS

##### ELECTRICAL

115 VOLT, 50/60HZ, 1 PHASE

230 VOLT, 50/60HZ, 3 PHASE

OTHER VOLTAGES AVAILABLE UPON SPECIAL REQUEST

##### AIR REQUIREMENT

45 PSI @ .5 SCFM

##### SHIPPING

WEIGHT: 320 POUNDS

CUBE: 44"X40"X24" (APPROX. 24 FT. CUBE)