



BakerSeries Single Door Roll-In Proofer **MODEL: LRP1 -Series**


INSTALLATION REQUIREMENT

Ships KD requires on-site installation
 Either 208 or 240 VAC 1 or 3-phase

1/2" NPT Cold water conection
 1/2" PVC vented drain connection

OPTIONS & ACCESSORIES

Stainless Steel Floor

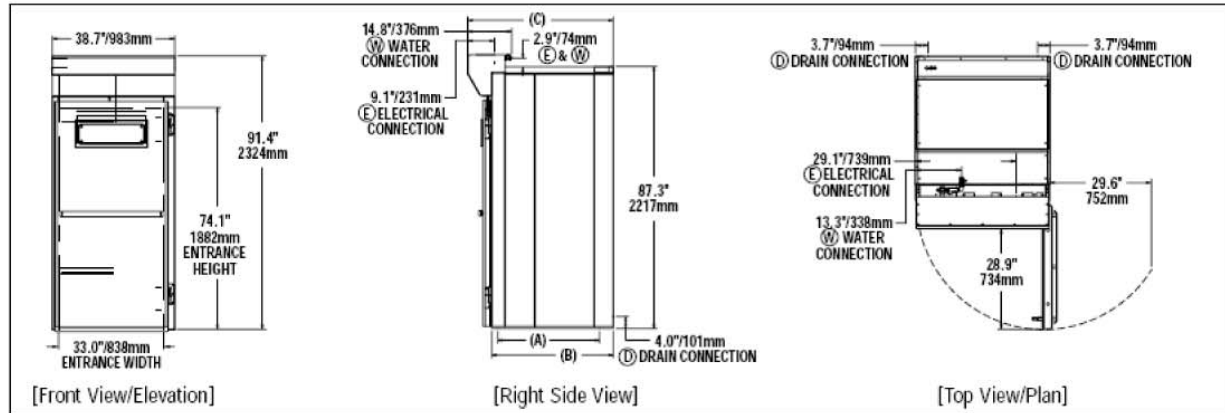

Model	Height		Width		Depth			Weight		Freight Class
	Int	Ext	Int	Ext	Internal "A"	Ext. "B"	Over All "C"	Actual	Ship	
LRP1-40	74.1"	91.4"	33.0"	38.7"	32.1	41	49.3	900	1000	70
LRP1-50					42.1	51	59.3	991	1116	70
LRP1-60					52.1	61	69.3	1094	1219	70
LRP1-70					62.1	71	79.3	1197	1322	70
LRP1-80					72.1	81	89.3	1321	1446	70
LRP1-90					82.1	91	99.3	1424	1549	70
LRP1-100					92.1	101	109.3	1527	1652	70
LRP1-110					102.1	111	119.3	1651	1776	70
LRP1-120					112.1	121	129.3	1754	1879	70

Electrical Requirements By Model

Model	Voltage	Total kW	1-Phase	3-Phase	Water	Drain
LRP1-(40-120)	208 VAC	5	24.0 AMPS	13.8 AMPS	1/2" NPT .07 GPM @ 60 PSI	1/2" PVC; 210 F; <1 GPM Max.
	240 VAC	6.6	27.5 AMPS	15.8 AMPS		

IMPORTANT: Your local water conditions may damage your LBC appliance. Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specification.

Parameter	Unit	Value
Alkalinity	ppm	22
Aluminium	ppb	17
Calsium	ppm	3.3
Free Chlorine Residual	ppm	0.6

Parameter	Unit	Value
Magnesium	ppm	0.65
pH	s.u.	8.5
Sodium	ppm	8.5
Total Hardness	ppm	11.9