



BakerSeries Triple Wide Roll-In Proofer

MODEL: LRP3 -Series


INSTALLATION REQUIREMENT

Ships KD requires on-site installation
 Either 208 or 240 VAC 1 or 3-phase

1/2" NPT Cold water connection
 1/2" PVC vented drain connection

OPTIONS & ACCESSORIES

Stainless Steel Floor

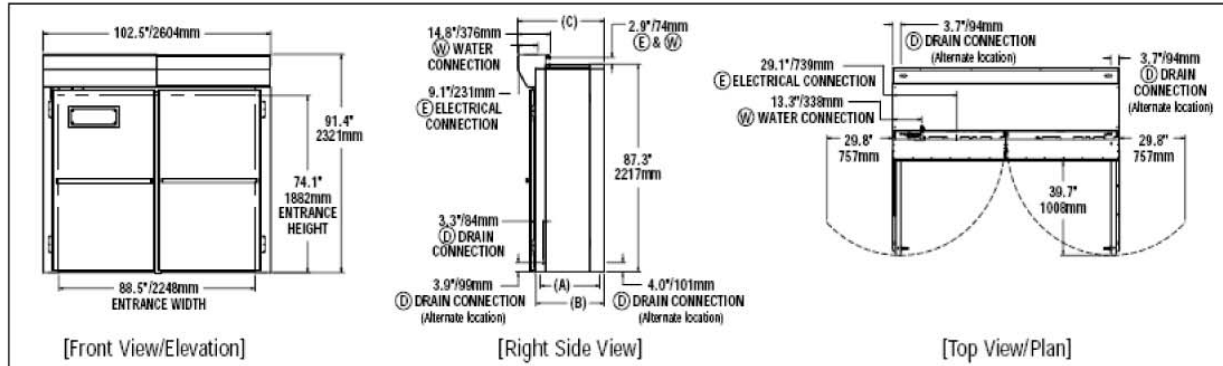

Model	Height		Width		Depth			Weight		Freight Class
	Int	Ext	Int	Ext	Internal "A"	Ext. "B"	Over All "C"	Actual	Ship	
LRP3-30	74.1"	91.4"	96.6"	102.5"	26.0"	31.0"	39.3"	1372	1472	70
LRP3-40					36.1"	41.1"	49.4"	1457	1582	70
LRP3-50					46.1"	51.1"	59.4"	1597	1722	70
LRP3-60					56.1"	61.1"	69.4"	1707	1832	70
LRP3-70					66.2"	71.2"	79.5"	1817	1942	70
LRP3-80					76.2"	81.2"	89.5"	1957	2082	70
LRP3-90					86.2"	91.2"	99.5"	2220	2345	70
LRP3-100					96.2"	101.2"	109.5"	2354	2479	70
LRP3-110					106.3"	111.3"	119.6"	2494	2619	70
LRP3-120					116.3"	121.3"	129.6"	2604	2729	70

Electrical Requirements by Model

Model	Voltage	Total kW	1-Phase	3-Phase	Water	Drain
LRP3-(40 - 80)	208 VAC	5	24.0 AMPS	13.8 AMPS	1/2" NPT .07 GPM @ 60 PSI	1/2"PVC; 210 F; <1 GPM Max.
	240 VAC	6.6	27.5 AMPS	15.8 AMPS		
LRP3-(90-120)	208 VAC	10.2	48.0 AMPS	26.6 AMPS	1/2" NPT .14 GPM @ 60 PSI	1/2"PVC; 210 F; <1 GPM Max.
	240 VAC	13.2	55.0 AMPS	31.6 AMPS		

IMPORTANT: Your local water conditions may damage your LBC appliance. Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specification.

Parameter	Unit	Value
Alkalinity	ppm	22
Aluminum	ppb	17
Calcium	ppm	3.3
Free Chlorine Residual	ppm	0.6

Parameter	Unit	Value
Magnesium	ppm	0.65
pH	s.u.	8.5
Sodium	ppm	8.5
Total Hardness	ppm	11.9