






Products by Category - Reach-In Proofer & Warmers
PRO-16 Proofer (With optional warmer)

Picture currently unavailable.

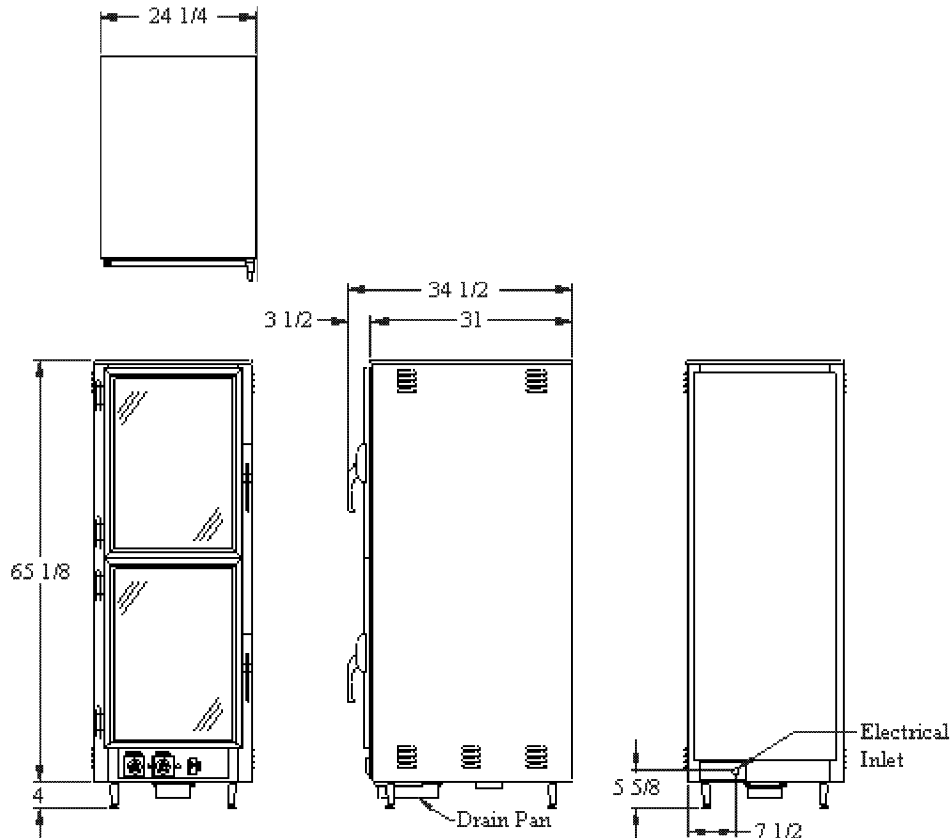

Click image to view larger.

Dimensions	H - 65 1/8" W - 24 1/8" D - 31"
Interior Dimensions	H - 26 3/4" W - 18 1/2" D - 28"
Capacity	16- 18" x 26" Full size pans with 3 1/4" spacing or 32- 13"x18" Half size pans with 3 1/4" spacing
Electrical	Proofer only 120 V, 1 phase, 19 amps, 60 Hz 1.8 kW Proofer with warmer option 120 V, 1 phase, 12 amps, 60 Hz

	120 V, 3 phase, 9 amps, 60 Hz 240 V, 1 phase, 12 amps, 60 Hz 240 V, 3 phase, 9 amps, 60 Hz 2.0 kW
Construction	Welded stainless steel utilizing non-magnetic 16 and 18 gauge. Minimum of 2" insulation. Control panel provides access from front of unit and heating elements accessible inside of cabinet and through top.
Controls	<ul style="list-style-type: none"> • Timer • Breaker on-off switch • Separate heat/humidity controls • Electromechanical controls • Indicator lights for thermostat • Lexan overlay for control panel
Standard Features	<ul style="list-style-type: none"> • Stainless steel construction • Aluminum interior • No racks required • Casters • Double door
Optional Features	<ul style="list-style-type: none"> • Casters • 6" adjustable legs • <i>AUTOMIST</i>® humidity system (Model PROW-16) • Stainless steel interior • Solid state controls • Single door • Warmer
Shipping Weight	350 Lbs. FOB Menominee, MI 49858
Listings	 

All specifications are subject to change without prior notice.
 Please contact the factory for current specifications and pricing.

Copyright ©2000 NU-VU Food Service Systems. All rights reserved.
 Revised: January 20, 2005.