


# REFRIGERATED SELF-SERVICE MERCHANDISER

## OPTIONAL ACCESSORIES:

- \* Special Laminate Finish
- \* Mirrored Stainless Steel Ends
- \* Security Night Cover
- \* Wire Shelves in lieu of Flat Metal
- \* Joining Kit for Continuous Line-ups
- \* Remote Refrigeration
- \* Front Condensing Unit Air Discharge
- \* Rear Access Doors
- \* Rear Side Panel Extensions (Six Inches)
- \* Slim 30" Deep Profile
- \* Black Interior (Including Shelving)
- \* Light Below Shelves
- \* Energy Saving Night Curtain
- \* Black or Gold Trim
- \* Wire Baskets in lieu of Flat Metal
- \* Deli Meat Hooks or Pegs
- \* Casters (Self-Contained Models Only) Cord Included.
- \* Cord & Plug (Self-Contained Models Only) (NEMA L14-20)
- \* Legs

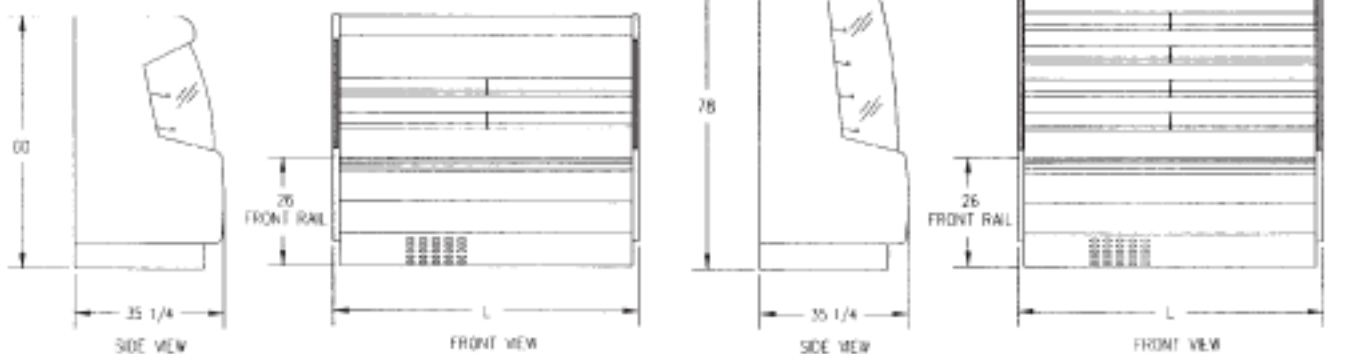

## SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained 3-Wire Plus Ground 120/208-240/60/1	Remote 120/60/1
RSSM-360SC	36" x 35 1/4" x 60"	709	2 (15" x 34")	1/2 HP - 10 AMPS	12 AMPS
RSSM-460SC	47 1/4" x 35 1/4" x 60"	800	2 (15" x 45")	3/4 HP - 13 AMPS	12 AMPS
RSSM-660SC	71 1/4" x 35 1/4" x 60"	1,020	4 (15" x 34")	1 HP - 15 AMPS	13 AMPS
RSSM-478SC	47 1/4" x 35 1/4" x 78"	925	4 (15" x 45")	3/4 HP - 13 AMPS	12 AMPS
RSSM-678SC	71 1/4" x 35 1/4" x 78"	1,220	8 (15" x 34")	1 HP - 15 AMPS	13 AMPS

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement - The minimum circuit ampacity and maximum fuse size is 20 amps.  
A 120/208-240 volt, 60 hertz, 1 phase, 3 wire plus ground power supply.
- Refrigerated cases are designed to operate in a maximum of 75° F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



**FEDERAL**  
a Standex company